



# Amp Box S3 CI

**Audiophile micro stereo power amplifier for custom installation**

MSRP 349€ (incl. VAT)

Colour options:  

- **NEW** Professional custom installation solution
- **NEW** Signal Sensing and Auto Power On
- **NEW** Level/Bass/Treble controls
- **NEW** RS232 control
- **NEW** professional speaker, RS232 & power sockets
- Signal sensing: input detection with standby/on for energy saving
- Audiophile PCB concept & sophisticated topology
- Lower distortion & better SNR
- Ultra compact & audiophile
- Advanced amplifier module
- Stereo input (RCA) + Stereo Loop Output (RCA)
- Trigger input and output
- Metal casing protects against vibration & interference
- Available in silver or black
- Made in Europe

**Power output:** 2 x 20 W / 34 W at 8 ohms / 4 ohms  
**Peak power:** 2 x 50 W at 4 ohms  
**Frequency response @ 20Hz:** Bass EQ variable  $\pm 11$  dB  
**Frequency response @ 20kHz:** Treble EQ variable  $\pm 5$  dB  
**Channel separation:** - 68dB at 10kHz  
**Signal-to-noise ratio:** 88dBV (95dBV - ,A' weighted)  
**THD+N:** <0,03% at 5W  
**Gain:** 37dB (level set to max.)  
**Input:** 1 pair RCA sockets  
**Input impedance:** 10 kohm  
**Trigger 12V DC:** In & Out, 2-pole jack socket  $\varnothing$  2,5mm  
**Power supply:** 20-24V/3A DC (universal power supply)  
**Dimensions W x H x D:** 103 x 36 x 112 (with sockets) mm  
**Weight:** 380g without power supply

## Custom Integration amp with Amp Box S3 technology inside!

The new Amp Box S3 CI enhances our Amp Box S3 design with new **custom integration features**.

**Auto Power:** powers on the unit automatically as soon as power supply is connected

**Signal Sensing:** monitors the input and turns the unit on/off depending on whether there is an input signal or not

**RS232:** control protocol widely used in custom integration, allows automation and smart home or home theater integration

**Level / Bass / Treble controls:** a must to fine tune level and frequency response to match any system

**Professional grade connectors:** safe and secure, no accidental unplugging of cables

The new Amp Box S3 CI offers **custom integrators** the **perfect tool** for **powerful and room-filling sound** to **every loudspeaker**. The same **new PCB concept & sophisticated topology** as in our Amp Box S3 achieves **less distortion and a better signal to noise ratio**. We designed this amp to **match the sound characteristics** of a **tube amplifier** as close as possible.

### Application examples:

- HiFi amplifier with EQ for 10-15 m<sup>2</sup> rooms
- Perfect amp addition for modern streamers\*
- Studio desktop amp for nearfield monitors
- Multiroom power amp solution
- Home cinema power amp upgrade
- In-wall or ceiling speaker amp
- Smart Home integration using RS232
- Lobbies & Hotels with complex RS232 integration
- Restaurants and Cafés audiophile PA system

*\*example application on next page*



## Outstanding quality made in Europe!


Amp Box S3 CI comes in a **full aluminium housing**, which effectively **protects against interferences and vibrations!** A must, considering the **complex use cases** where **interference and EMI/RFI radiation** will be high!

With its **small size**, the Amp Box S3 CI will **not take up the very limited space** that custom integrators often struggle with.

When the Amp Box S3 CI is not hidden and proudly displayed in **studio or home theater systems**, the simple and **luxurious design** with **beautifully finished aluminium** surfaces allows for a **clean and beautiful** setup.

The new Amp Box S3 CI is **designed and produced in Europe** and is available in a black & silver finish.

## The Perfect Amp Addition to Modern Streamers

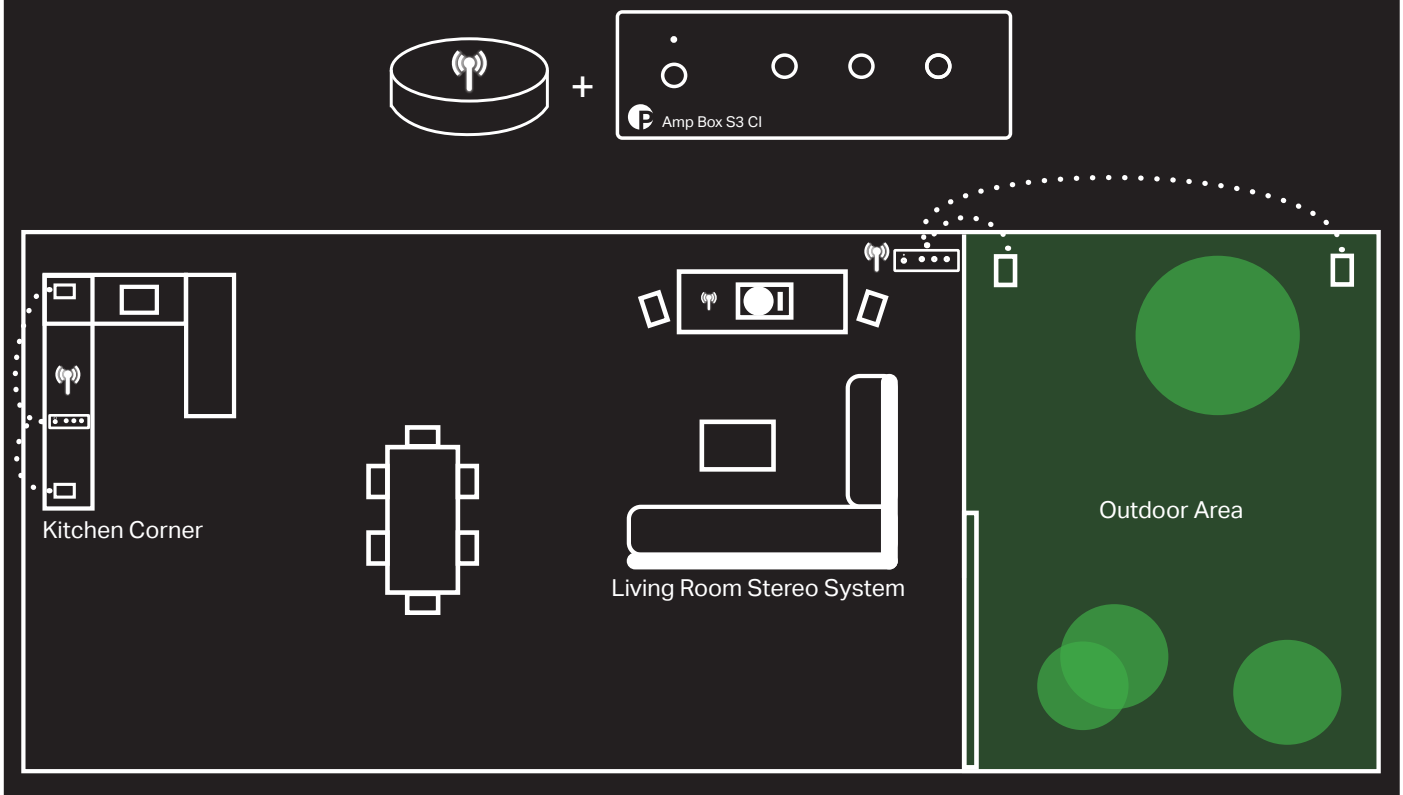

### The perfect amp for modern streamers

**Small affordable modern streamers** have been on the rise recently, and the **Amp Box S3 CI** is the **perfect tool** to build **super compact** and **incredibly powerful** sounding hifi systems for **additional zones** in your living space.

With custom integration features like **signal sensing** and **RS232** the Amp Box S3 CI can be **smoothly integrated** in smart home environments and will **seamlessly work with the streamer** it accompanies. No need to worry if the Amp Box S3 CI is turned on or off. The Amp Box S3 CI does this automatically for you.

Using the **EQ** you can **fine tune the audio reproduction**, this is important as secondary zones will not always allow you to place speakers as freely and correctly as you want.

The above example shows you how the Amp Box S3 CI is used to **add a zone** for the **kitchen** corner and an **outdoor zone** to a **smart home** or even **hotel, vacation rental or Airbnb-type** environment. The Amp Box S3 CI brings **small size, easy integration** and **true hifi stereo** quality to wherever you need it.